

# 4" PEARL SLIM DOWNLIGHT 8W 5 COLORS IN 1



## LED Driver

Iron driver box or aluminum box  
Rated FT6 DC wire

## Back-Lite LED Downlight

Private design; Appearce with new streamline design, unique & beautiful



PEARL



## Anti-Light Leakage

Integrated structre improves productivity, and avoid light leakage



## Easy Installation

Flat and smooth surface makes installation easier  
Two spring clips can be attached to any ceiling material



## Dimming

5%-100% dimmable  
TRIAC/ELV dimmers





## Multi-color Finish

White, black, silver & brushed nickel colors available



## PRODUCT DIMENSIONS

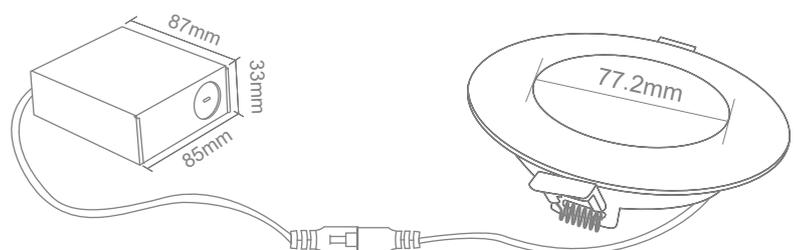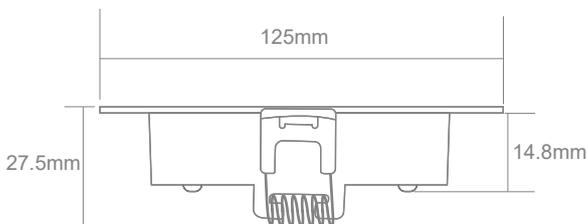

# SPECIFICATIONS

## Product

**SL-DR1604G55WH-08**

Type	4" Back-Lite Pearl Slim Downlight				
Power	8W				
Voltage - Frequency	120VAC 60Hz				
Color Temp. (ANSI)	2700K	3000K	3500K	4000K	5000K
CRI (Ra)	80	80	80	80	80
Typical lumens (lm)	750	750	770	800	850
Efficacy (LPW)	75	75	77	80	85
Beam Angle	120°				
Dimmable	5%-100%				
Power Factor	>0.9				
Rated Lifetime - L70 (hrs.)	35,000				
Operating Temperature	-20°C~50°C				
Dia. x MOL	4.92"x1.08" (125x27.5mm)				
Driver Dimensions (LxWxH)	3.4"x3.3"x1.3" (87x85x33mm)				
Ceiling Opening Dia.	3.04" (77.2mm)				
Weight (lb. / g)	310g				

## 5 COLORS IN 1 DOWNLIGHT INSTRUCTION

There is dip switch on the front of driver box, and regularly marks 2700K/3000K/3500K/4000K/5000K/SW, the dip switch also called CCT select-able.

### 1. By dip switch

Select certain color temperature (2700K/3000K/3500K/4000K/5000K) on dip switch, then the light will be that color. Wall switch only has ON/OFF function under this situation.

### 2. By wall switch

Select "SW" on the dip switch firstly, then turn on the wall switch, the default first ON CCT is 5000K, then "ON-OFF-ON" the wall switch in 2S, the CCT will be 2700K/3000K/3500K/4000K/5000K in orderly. After "ON-OFF-ON" is continuous for 8 times, the CCT of the lamp will stay at 2700K, no longer changing. If you need to change the CCT again, turn OFF the lamp and ON again after 6-8S to restart the CCT changing function.

If light is off longer than 6-8S, it has memory function and CCT keeps same as last time when you turn it on.




## NEW CONSTRUCTION OR REMODEL INSTALLATION

### 1 Tools to open the appropriate holes in the ceiling.




Find out the template(for the hole size installation) in the box, use the circle template to measure the size of holes then cut out holes.


### 2 Connect the AC power.




- 1.Open the box.
- 2.Take out accessory of wire clip.



- 1.Remove one of the knockouts of the side plate.




- 1.Remove one of the knockouts on the side plate.
- 2.Put wires through the hole.




- 1.Simply inserting the two ends of L,N,G wire separately into clips and turning.
- 2.Lock the Box Cover.

### 3 Holding the clips, and push the fixture into installation hole.



### 4 Release spring clips and push into place.

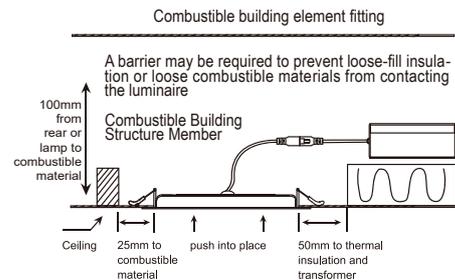

**SHENZHEN YIYUANLAI SCIENCE & TECHNOLOGY CO.,LTD**

Tel:0755-89399066

E-mail:sales03@ssluce.com

Website://www.ssluce.com

Add:Room 127, 1/F, No.1 Building, Bantian Hi-tech Industrial Zone, Bantian Street, Longgang District, Shenzhen, Guangdong